SPECIFICATION DATA
V200-2016-R0

BALANCE TYPE GLOBE CONTROL VALVE

SERIES

V200

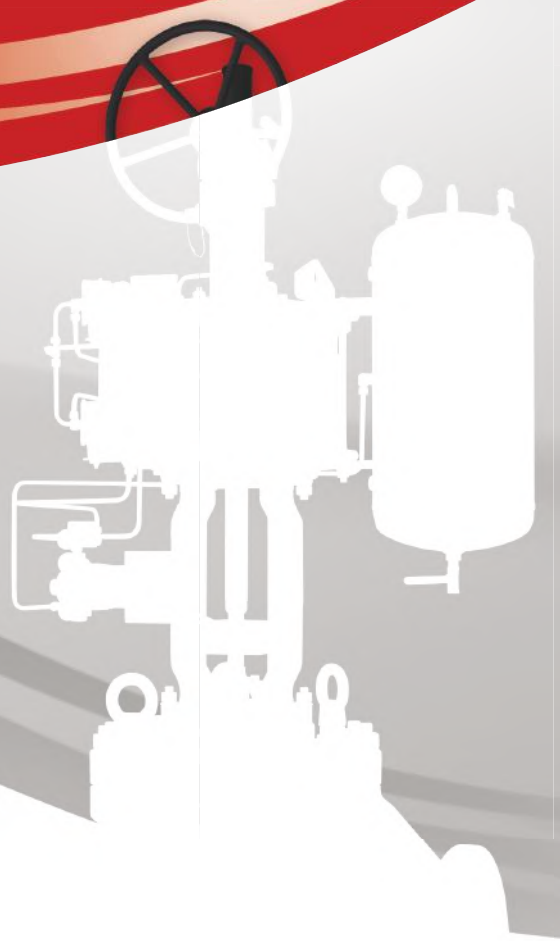

UNICON

CONTENTS

FEATURES	03
BODY STYLE	04
BONNET STYLE	04
TRIM DESIGNS	05
RATED Cv VALUE AND STROKE	06
FLOW CHARACTERISTICS	07
SPECIFICATION	10
SELECTION GUIDELINE	12
MATERIALS OF CONSTRUCTION	14
DIMENSIONS	19
NUMBERING SYSTEM	22

CERTIFICATE NO FS/71/220/15/0083 PAGE 1/1

LICENCE HOLDER

UNICON SYSTEM Co., Ltd.
21 Block 13 Lot, 72, Gangchon-ro,
139 Beon-gil,Danwon-gu,
Ansan-si, Gyunggi-do, Korea

MANUFACTURING PLANT

UNICON SYSTEM Co., Ltd.
21 Block 13 Lot, 72, Gangchon-ro,
139 Beon-gil,Danwon-gu,
Ansan-si, Gyunggi-do, Korea

PROJECT NO/ID: H3XY

LICENSED TEST MARK

CERT. REPORT NO.: H2XY0001

Tested according to: IEC 61508:2010 Ed.2

Certified product(s): Globe Valve V200 Series

Model(s): Class 150~2500 (Balanced, Unbalanced)

Technical Data and Parameter: The products fulfil the requirements of functional safety acc. to IEC 61508. The products can be used with a hardware fault tolerance HFT = 0, e.g. in a 1oo1- architecture up to SIL 3 and with HFT = 1, e.g. in an 1oo2 architecture up to SIL 3.

Specific Requirements: This certificate confirms the achievement of the requirements of functional safety based on the following proofs:
- Proof of systematic safety integrity for defined phases of the life cycle
- Proof of the required safety-related parameters (failure rate, PFD and SFF by means of FMEDA)
- Proofs that processes and methods are established at the manufacturer guaranteeing that unacceptable processes in terms of risk analysis, design, production, validation, change management and quality management comply with the safety-related standard (see H2XY0001).

Certification Body for Functional Safety SQS-TÜV Saar GmbH

Munich, 2015-03-16

CERTIFICATE

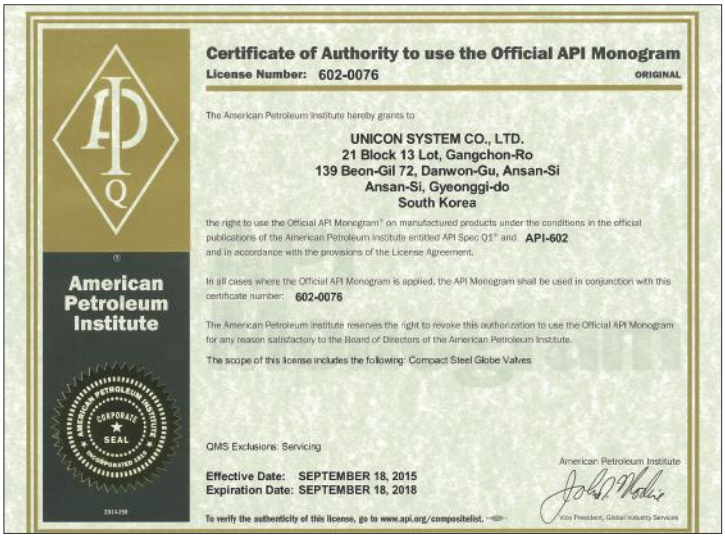
Certificate of Authority to use the Official API Monogram

License Number: 602-0076

ORIGINAL

The American Petroleum Institute hereby grants to

UNICON SYSTEM CO., LTD.
21 Block 13 Lot, Gangchon-Ro
139 Beon-Gil 72, Danwon-Gu, Ansan-Si
Ansan-Si, Gyeonggi-do
South Korea

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and API-602 and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: 602-0076

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Compact Steel Globe Valves

American Petroleum Institute

CORPORATE SEAL

QMS Exclusions: Servicing

Effective Date: SEPTEMBER 18, 2015
Expiration Date: SEPTEMBER 18, 2018

American Petroleum Institute

Vice President, Global Industry Services

To verify the authenticity of this license, go to www.api.org/compositelist.

MAIN PRODUCT FEATURE

- The structure of large stroke and complete guiding enhances the stability of plug under large pressure, reduces side load and plug vibration, and prolongs the service life of valve.
- The standardized and modularized design makes the performance more reliable.
- The piston ring and high performance seal ring are adopted for sealing so as to enhance the leakage level.
- The packing box adopts maintenance-free self-tightening sealing design, which is more safe and more reliable.
- The packing box system is additionally provided with dust cover to effectively prevent dust and sundries from entering into the packing box.
- The body is completely interchangeable with that of single seat valve, and the online replacement of valve trims can be realized.
- The pressure containing parts are designed in accordance with ASME nuclear power level standard, with more safe use and being more applicable to severe working conditions.

V200 SERIES
SERIES CAGE CONTROL VALVE

- V200 Series cage control valve is a kind of high performance pressure balancing control valve produced by our company through introducing advanced technology from abroad. In this series valve, the structure of body is compact, the plug can realize complete guiding through cage with good anti-vibration performance and the high performance seal ring are adopted for sealing so as to enhance the leakage level. It has such features as small volume, light weight, small pressure drop loss, large flow, wide rangeability, highly precise flow characteristic curve, good dynamic stability, low noise, small cavitation corrosion and small leakage. The series products can be widely used in the occasions where the allowable pressure drops is relatively higher.

- The control valve is allocated with new generation high performance actuator as a standard. With compact structure and large output force, it is suitable for controlling various media of different pressure and temperature.



UNICON BODY STYLES

Globe V/V
globe style bodies feature smooth, streamlined, constant -area internal passages with no pockets, permitting high capacity with minimum turbulence.
They are designed with nearly constant wall thickness, providing lower weight and cost when manufactured in expensive stainless or alloy steels.

Angle V/V
Except for the body, the angle-style valve is completely interchangeable with the globe style-all other valve parts remain the same. For additional body protection, extending to the outlet flange, is available.

Jacket V/V
The jacket valve uses a standard globe body with oversized, blind flanges for a full jacket of standard flanges for a partial jacket. The jacket is equipped with drain connection.

UNICON BONNET STYLES

The standard bonnet enable the forming of a Deep packing box together with a long guide Housing there by providing a robust and vibration resistant assembly. Teflon rings are the standard packing up to 250°C.

Protects the packing from excessive heat or cold, which may adversely affect valve or packing performance. Application temperature range depends upon valve and bonnet construction materials.

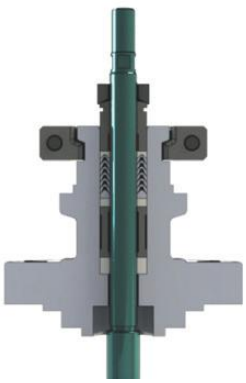

STANDARD BONNET

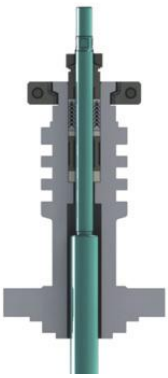

EXTENSION BONNET

BELLOWS BONNET

CRYOGENIC BONNET

Provides for a positive metalic gland seal within the rate pressure and temperature of the bellows metarial selected. Use on hazardous, lethal service an auxiliary packing box in the upper bonnet serves as a back up seal in the unlikely event of a bellows failure.

Permits stagnated moderate temperature gas to from within the bonnet which protects the packing from the extremes of temperature produced by the line fluid.

Normally constructed in stainless steel it operated to – 196˚C

TRIM DESIGNS

P-Port
Parabolic contoured plug



Multi-stage, High attenuation
Low-Noise and Anti-Cavitation



Single stage Multi-hole
Low-Noise and
Anti-Cavitation



Labyrinth Disk Stack /
Anti-cavitation
Low noise High pressure drop trim



Double stage, High
attenuation
Low-Noise and Anti-
Cavitation

Performance

- High Flow Capacity
- Tight Shutoff
- Stable Operation
- Excellent Flow Control Rangeability

Design Flexibility

- Inherently characterized trim offered in equal %, linear and quick opening.
- Multi trim size available.
- Full rationalized and interchangeable features.

Design Integrity

- Quick changed trim for easy maintenance.
- Large diameter stems for stable operation.
- Heavy duty top guiding with no bottom guide to obstruct seat bore and potentially trap debris.

Various Trim Options

- Designed to handle high pressure drops in severe service applications for incompressible fluids. Complete cavitation protection is available for pressure drops up to 3000 psi.
- Tighter shutoff capability at high operating temperatures is achievable using a spring-loaded internal auxiliary plug construction. An optional downstream diffuser is also available for additional noise reduction.
- Designed for noise control on gas or steam at high pressure drop ratios. Also available for anti-cavitation on high pressure liquid applications.

RATED CV VALUE AND STROKE

Trim Size (Inches)	Stroke (mm)	Cage (Window)			1-Stage Drilled Hole		2-Stage Drilled Hole		3-Stage Drilled Hole	
		Quick Opening	Linear	EQ-%	Linear	EQ-%	Linear	EQ-%	Linear	EQ-%
5/32"	10	0.4	0.3							
1/4"	20	1	0.8							
3/8"	20	2.3	1.8							
1/2"	20	4	3.2							
5/8"	20	6	5.2		5.2	5.2	5.2	5.2	5.2	5.2
3/4"	20	9	7		7	7	7	7	7	6
1"	20	16	12		12	12	10	9	9	8
1-1/4"	20	25	20		20	17				
	30						20	17	18	16
1-1/2"	20	33	28		26	22				
	30						25	21	22	20
2"	30	60	50		48	42				
	40						44	38	40	35
2-1/2"	30	80	70		66	58				
	40						75	60	70	55
3"	40	132	110		100	90	90	70	75	60
4"	40	210	180	160	150	130	120	94	110	90
5"	60	320	300	280	270	230	230	180	210	160
6"	60	430	400	360	340	290	280	210	250	190
7"	80	660	580	520	500	430	430	330	400	300
8"	80	860	720	640	600	520				
	90						540	420	500	380
9"	90	1000	900	800	780	600				
	100						690	540	640	490
10"	100	1400	1200	1100	940	800	780	600	720	540
12"	120	1900	1600	1400	1400	1200	1100	850	1000	760
14"	150	2760	2300	2000	1900	1700	1600	1300	1400	1100
16"	150	3300	2800	2400	2300	2000	1900	1500	1700	1300
18"	200	4560	3800	3400	3300	2800	2700	2200	2500	2000

Note!
Trim size is variable per class rating.

FLOW CHARACTERISTICS

The flow characteristic describes the relationship between the flow coefficient and the valve stroke. It is inherent to the design of the selected valve. For example, as the valve is opened, the flow characteristic allows a certain amount of flow through the valve at a particular percentage of the stroke. This is especially important for throttle control because it controls the flow in a predictable manner. The flow rate is affected by the flow characteristic as well as the pressure drop. Inherent flow characteristic is when the valve is operating with a constant pressure drop without taking into account the effects of piping. Installed flow characteristics consider both the valve and piping effects. This is also considered an ideal curve and takes the entire system into account.

Equal percentage

Equal percentage is the characteristic most commonly used in process control. The change in flow per unit of valve stroke is directly proportional to the flow occurring just before the change is made. While the flow characteristic of the valve itself may be equal percentage, most control loops will produce an installed characteristic approaching linear when the overall system pressure drop is large relative to that across the valve.

Linear

An inherently linear characteristic produces equal changes in flow per unit of valve stroke regardless of plug position. Linear plugs are used on those systems where the valve pressure drop is a major portion of the total system pressure drop.

Quick-opening

Quick opening flow is characterized by the maximum flow produced immediately as the valve begins to open. It is only used for on-off applications and due to the extreme nature of the flow, the inherent and installed characteristics are similar.

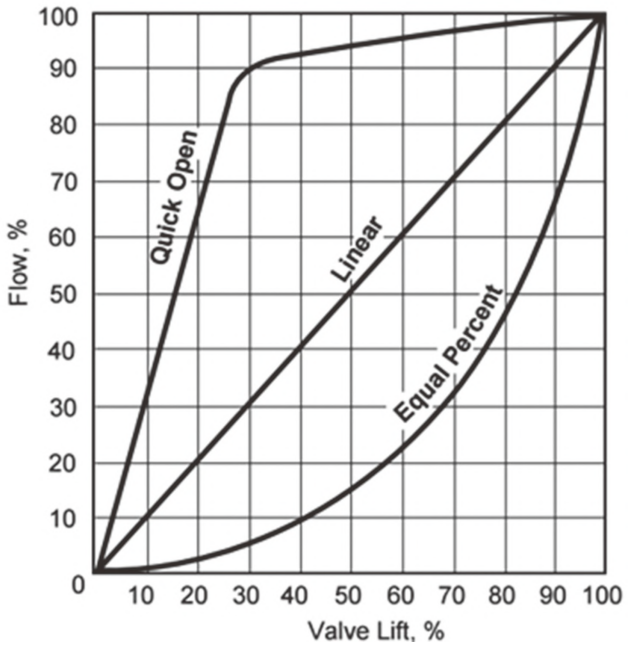

Inherent Flow Curves for Various Valve Plugs

DISK STACK TRIM APPLICATIONS

Severe service Power Plant

Main & Start-up feed pump recirculation
Main & Booster feed water recirculation
Condensate booster pump recirculation
Deaerator level control
Turbine by-pass steam generator blow down
Auxiliary steam shoot blower control
Boiler start-up main steam spray
Pressurizer PORV/CVCS letdown
HP coolant injection
Atmospheric steam dump
Atmospheric venting silencer

Severe service Power Plant

Compressor recycle & Anti-surge / kick back
Pump minimum flow & Recirculation
Blow down discharge to vent flare
Reactor depressurization
Turbo expander by-pass
Gas injection lift control
Gas storage pressure letdown
Gas flow regulation
Pipeline anti-surge
Heavy oil letdown
Ethylene letdown
Steam vent to atmosphere
Gas choke valves

Severe service Power Plant

Prolonged trim life
Eliminates downtime
Effective noise control
Reduction of pipe fatigue
Flexible characterization
Control valve vibration
Reduced maintenance cost.
Faster start-up

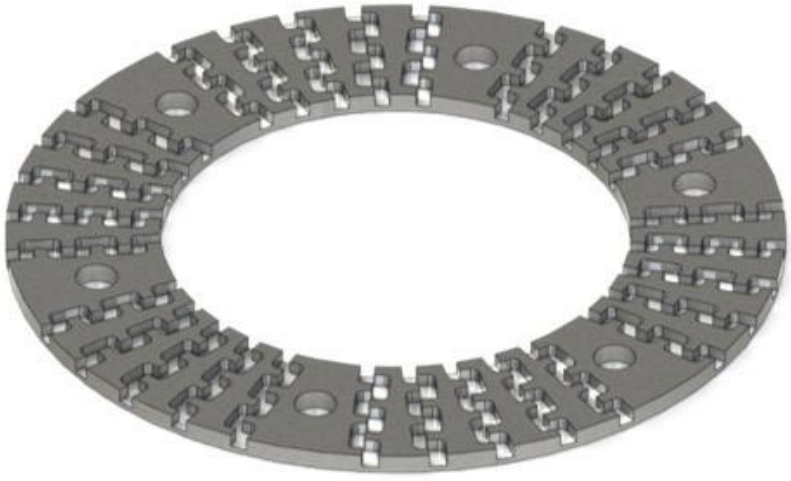

DISK STACK TRIM

Disk Stack

The disk stack incorporates a unique advanced design that is super at limiting flowing velocities to low levels resulting in valves providing service that is quiet, non cavitations and non erosive.

Disk stack low velocity is achieved through the use of a trim cage made by bonding together a series of individual disks. Each disk has a pattern of carefully controlled orifices and channels with a multitude of sharp turns etched into its surface. As the trim plug travels within the cage the fluid is throttled and forced to travel an extremely tortuous path with each turn effecting a stage of pressure drop.

The combined effect of numerous narrow flow channels, each with many sharp turns and a continually expanding flow path, removes kinetic energy from the fluid while gradually lowering its pressure. In doing so, abrupt velocity increases that are the source of noise are avoided. The additional benefit for liquid flow is the elimination of cavitations and the damage it can do a valve, its trim and the down stream piping.

By its very design, Disk stack allows for many more stages of drop than conventional tortuous path

times. Resolves existing problems for both compressible and incompressible fluid flow applications,

Technology benefits

- Increased plant production
- Reduced maintenance costs
- Elimination of damage from cavitation, noise and pipe vibration
- Prolonged trim life
- Custom engineered valve designs to fit your piping construction.
- Simpler trim maintenance ; it's the trim structure of stack type and can be disassembled completely.

Therefore it can be required easily when a partial damages on the stack occurs or a dust flow in.

Disk stack Trim technology is recognized as the optimum severe service solution available today, and is custom engineered to solve severe service problems.

Pressure Drop & Velocity Change Profile Through The Valve

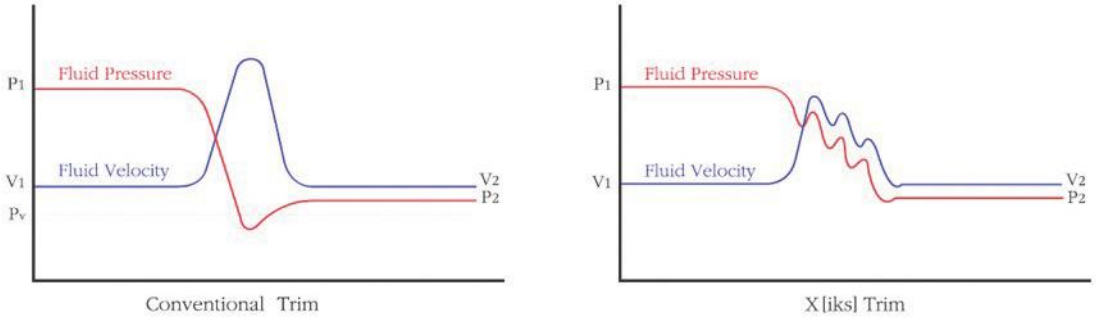

GENERAL BODY SPECIFICATION

BODY TYPE	Straight Way (2Way Globe)
BONNET	Plain(Standard), Fin & Extension, Bellows Seal Long Extension(Cryogenic Service)
SIZE RANGE	1 1/2" to 32"(DN40…DN800) Option : Larger than 32 inches
PRESSURE RATING	ANSI 150LBS to2500LBS (Option : 4500LBS) JIS 10K to 180K PN20 to PN420
OPERATING PRESSURE RANGE	Up to 6,171psi (g) Up to 434 Kg/cm² (g)
OPERATING TEMPERATURE RANGE	-58˚F to +1,050˚F -50˚C to +565˚C Option : -320˚F to +1,562˚F, -192˚C to +850˚C
END CONNECTION	Socket Weld – ANSI B16.11 Butt Weld – ANSI B 16.25 FF/RF/RTJ Flange – ANSI B 16.5 Option : JIS Flange, DIN Flange, NPT/PT Screw
MATERIAL	Carbon Steel(WCB, WCC, A105) Chrome-moly Steel(WC6, WC9, C12A, F11, F22, F91) Stainless Steel(CF8, CF8M, CF3, CF3M, F304, F304L, F310, F316L) Duplex Stainless Steel, Monel, AL Bronze, Inconel 625 Hastelloy B/C, Other Alloy
ACTUATOR	Pneumatic Diaphragm Pneumatic Cylinder Electric Motorized Electric Hydraulic

STANDARD TRIM SPECIFICATION

Balanced Plug Type Quick Changed Trim

SIZE RANGE	1-1/2" to32"
TRIM TYPE	P-Port (Parabolic Contoured Plug) Cage Window Low-Noise Drilled Hole Cage (1/2/3-Stage) Anti-Cavitation Channel Cage (1/2/3-Stage) Labyrinth Disk Stack Hybrid Trim (Disk Stack + Drill Hole Cage)
PLUG GUIDE METHOD	Cage Guide
FLOW DIRECTION	Gas, Steam : Flow to Open Liquid : Flow to Close (* Note)
Cv RANGE	12 to 6800
FLOW CHARACTERISTIC	Linear, Equal %, Modified Equal %, Quick Open
SEAT LEAKAGE	FCI-70.2 Standard : ANSI Class IV Option : ANSI Class V ANSI Class VI (Soft Seat) MSS-SP61 (On-Off)
MATERIAL	316 SS, 316 SS + Stellite #6 Hardeness 410 SS/ 400C SS 17-4PH, F22(Nitride treatment), F51 Inconel 718, XM19 Solid Tungsten Carbied Etc.

Note!
Flow Direction can be changed according to your specifications.

SPECIAL SPECIFICATION

SPECIAL SPECIFICATIONS	Material Certificate, Characteristics Testing, Radiation Testing(RT) Liquid Penetration Testing (PT), Low Temperature Testing
SPECIAL REQUIREMENTS	Oxygen Clean, Copper-Free Alloy. Water-Free Special Piping and Fitting, Salty Environment Proof Cold Area Proof, Tropical Area Proof, Non-standard Painting.

SELECTION GUIDELINE

VELOCITY LIMITATIONS

In selecting a valve for either a liquid or gas/vapour application one of the major considerations is the effect of fluid velocity. High velocity could lead to operational problems including erosion, excessive vibration and instability. The following tables indicate the maximum recommended velocity values for liquid and gas/vapour services.

Recommended Maximum Velocities for Liquid Flow

Trim Design	Valve Size		Carbon Steel		Alloy Steel		Bronze	
Size	in	mm	ft / sec	m / sec	ft / sec	m / sec	ft / sec	m / sec
Microflow	0.5 to 1	15 to 25	43	13.1	52	15.8	26	7.6
Contoured	0.5 to 2	12 to 50	41	12.5	46	14	25	7.6
	2.5 to 6	65 to 150	34	10.4	34	10.4	20	6.2
	8 to 14	200 to 350	29	8.9	29	8.9	17	5.2
	16 to 18	400 to 450	22	6.7	22	6.7	13	14
	20	500	18	5.5	18	5.5	11	3.4
	24	600	12	3.7	12	3.7	7	2.1
Hard Facing	0.5 to 12	15 to 300	43	13.1	52	15.8	26	7.6
	14 to 500	350 to 500	35	10.7	43	13.1	21	6.4
	24	600	25	7.6	35	10.7	15	4.6

Recommended Maximum Velocities for Gas/Vapours Flows

Trim Design	Valve Size		Maximum Inlet		Maxinum Outlet		Maximun Out Mach. No. for Required Noise Level		
Size	in	mm	ft / sec	m / sec	ft / sec	m / sec	>95dBA	<95dBA	85dBA
Microflow	0.5 to 1	15 to 25	475	144	830	253	0.65	0.5	0.3
Contoured	0.5 to 2	12 to 50	340	104	830	253	0.65	0.5	0.3
	2.5 to 6	65 to 150	295	90	830	253	0.65	0.5	0.3
	8 to 14	200 to 350	265	81	830	253	0.65	0.5	0.3
	16 to 18	400 to 450	190	58	830	253	0.65	0.5	0.3
	20	500	150	46	830	253	0.65	0.5	0.3
	24	600	115	35	830	253	0.65	0.5	0.3
Hard Facing	0.5 to 24	15 to 600	475	144	830	253	0.65	0.5	0.3

Contoured Trim

Valve Size		Body Rating	Seat Type	Packing Material	Temperature Range						Seat Leakage IEC 60534-4 and FCI 70-2 Class	
					Standard Bonnet		Extension Bonnet		Cryogenic Bonnet			
in	mm				min.	max.	min.	max.	min.	max.	Standard	Option
0.5 to 8	15 to 200	ANSI 150 to 600 LBs and Equivalent JIS, PN	Metal	PTFE Aramid	-20°F (-29°C)	+450°F (+232°C)	-100°F (-73°C)	+800°F (+427°C)			IV	V
				Graphite	-20°F (-29°C)	+800°F (+427°C)	-100°F (-73°C)	+800°F (+427°C)				
				V-PTFE					-320°F (-196°C)	+450°F (+232°C)		
			Soft	PTFE Aramid	-20°F (-29°C)	+450°F (+232°C)	-100°F (-73°C)	+450°F (+232°C)			VI	

Low-Noise / Anti-Cavitation Trim

Valve Size		Body Rating	Seat Type	Packing Material	Temperature Range						Seat Leakage IEC 60534-4 and FCI 70-2 Class	
					Standard Bonnet		Extension Bonnet		Cryogenic Bonnet			
in	mm				min.	max.	min.	max.	min.	max.	Standard	Option
0.5 to 8	15 to 200	ANSI 150 to 600 LBs and Equivalent JIS, PN	Metal	PTFE Aramid	-20°F (-29°C)	+450°F (+232°C)	-100°F (-73°C)	+800°F (+427°C)			IV	V
				Graphite	-20°F (-29°C)	+800°F (+427°C)	-100°F (-73°C)	+800°F (+427°C)				
				V-PTFE					-320°F (-196°C)	+450°F (+232°C)		

1. ANSI 900-1500LBs available only in 0.5 to 4 inch (15 to 100 mm) sizes.
   ANSI 2500LBs available only in 0.5 to 2 inch (15 to 50 mm) sizes.
2. See Materials of Construction Tables for other temperature limitations.
3. 2-Stage design only available with Quick Change seat rings.
4. 2-Stage Anti-Cavitation Trim not available in 6 inch (150 mm) and 8 inch(200 mm) size.
5. PTFE Aramid Inorganic Coil Packing for low emissions applications is limited to maximum pressure and temperature as shown in the chart below.
6. Soft seat is limited to a maximum of 1000 psi (70 bar) pressure drop and a maximum of 450°F (232°C).

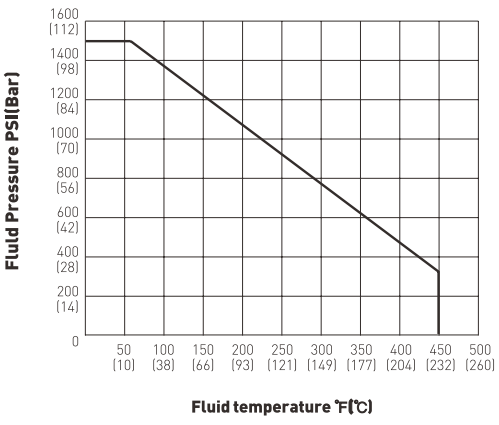

Pressure and Temperature Rating of LE Packing

MATERIALS OF CONSTRUCTION

STANDARD CARBON STEEL VERSION

Part No.	Temperature Range	-20°F (-29°C)	450°F (232°C)	650°F (343°C)	800°F (427°C)
	Description	Standard Materials			
1	Body	A216 Gr. WCB			
2	Bonnet	A216 Gr. WCB			
3	Seat Ring	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
4	Plug/Disc	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
5	Valve Stem	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		17-4PH (630) Stainless Steel			
6	Cage	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
7	Guide Bushing	410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
8	Body Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
9	Seat Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
10	Paug Pin	316 Stainless Steel			
11	Packing	V-PTFE	Grahpite		
		PTFE Aramid Inorganic Coil			
12	Lantern Ring	304 Stainless Steel			
13	Packing Gland	304 Stainless Steel			
14	Packing Flange	304 Stainless Steel			
15	Body Stud Bolt	A193 Grade B7			
16	Body Stud Nut	A194 Grade 2H			
17	Packing Stud Bolt	A193 Grade B8			
18	Packing Stud Nut	A194 Grade 8			
19	Yoke Half Clamp	304 Stainless Steel			
20	Clamp Hex. Bolt	A193 Grade B8			
21	Clamp Hex. Nut	A194 Grade 8			

1. 17-4 PH ST.ST will be substituted when required due to the differential pressure.
2. 410 SS bushing not used in combination with 316 SS trim.
3. Standard material for two stage lo-db (drilled hole) cages.
4. Required for Quick Change trim only.
5. Use Solid Stellite plug for Cv smaller than 1.7.
6. Guide bushings not used with close clearance trim.
7. Solid Stellite is not available for Low-Noise/Anti-Cavitation plugs.

STANDARD STAINLESS STEEL VERSION

Part No.	Temperature Range	-20°F (-29°C)	450°F (232°C)	650°F (343°C)	800°F (427°C)
	Description	Standard Materials			
1	Body	A351 Gr. CF8M			
2	Bonnet	A351 Gr. CF8M			
3	Seat Ring	316 Stainless Steel			
		316 Stainless Steel + Stellite #6 Hard Facing			
4	Plug/Disc	316 Stainless Steel			
		316 Stainless Steel + Stellite #6 Hard Facing			
5	Valve Stem	316 Stainless Steel			
		17-4PH(630) Stainless Steel			
6	Cage	316 Stainless Steel			
7	Guide Bushing	316 Stainless Steel + Stellite #6 Hard Facing			
8	Body Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. + Teflon -Sprial Wound			
9	Seat Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
10	Paug Pin	316 Stainless Steel			
11	Packing	V-PTFE	Grahpite		
		PTFE Aramid Inorganic Coil			
12	Lantern Ring	316 Stainless Steel			
13	Packing Gland	316 Stainless Steel			
14	Packing Flange	316 Stainless Steel			
15	Body Stud Bolt	A193 Grade B8			
16	Body Stud Nut	A194 Grade 8			
17	Packing Stud Bolt	A193 Grade B8			
18	Packing Stud Nut	A194 Grade 8			
19	Yoke Half Clamp	304 Stainless Steel			
20	Clamp Hex. Bolt	A193 Grade B8			
21	Clamp Hex. Nut	A194 Grade 8			

1. Required for Quick Change trim only.
2. Standard material for two stage lo-db (drilled hole) cages.
3. Use Solid Stellite plug for Cv smaller than 1.7.
4. Guide bushings not used with close clearance trim.
5. Solid Stellite is not available for Low-Noise/Anti-Cavitation plugs.

STANDARD CHROME MOLY VERSION

Part No.	Temperature Range	-20°F (-29°C)	450°F (232°C)	650°F (343°C)	800°F (427°C)
	Description	Standard Materials			
1	Body	A217 Gr. WC9			
2	Bonnet	A217 Gr. WC9			
3	Seat Ring	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
4	Plug/Disc	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
5	Valve Stem	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
		17-4PH (630) Stainless Steel			
6	Cage	304 Stainless Steel			
		410 Stainless Steel + Heat Treatment			
7	Guide Bushing	410 Stainless Steel + Heat Treatment			
		304 Stainless Steel + Stellite #6 Hard Facing			
8	Body Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
9	Seat Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
10	Paug Pin	316 Stainless Steel			
11	Packing	V-PTFE	Grahpite		
		PTFE Aramid Inorganic Coil			
12	Lantern Ring	304 Stainless Steel			
13	Packing Gland	304 Stainless Steel			
14	Packing Flange	304 Stainless Steel			
15	Body Stud Bolt	A193 Grade B7			
16	Body Stud Nut	A194 Grade 2H			
17	Packing Stud Bolt	A193 Grade B8			
18	Packing Stud Nut	A194 Grade 8			
19	Yoke Half Clamp	304 Stainless Steel			
20	Clamp Hex. Bolt	A193 Grade B8			
21	Clamp Hex. Nut	A194 Grade 8			

1. 17-4 PH ST.ST will be substituted when required due to the differential pressure.
2. Required for Quick Change trim only.
3. Standard material for two stage lo-db (drilled hole) cages.
4. Use Solid Stellite plug for Cv smaller than 1.7.
5. Guide bushings not used with close clearance trim.
6. Solid Stellite is not available for Low-Noise/Anti-Cavitation plugs.

NACE MATERIALS CONSTRUCTION

Part No.	Temperature Range	-20°F (-29°C)	450°F (232°C)	650°F (343°C)	800°F (427°C)
	Description	Standard Materials			
1	Body	A351 Gr. CF8M			
2	Bonnet	A351 Gr. CF8M			
3	Seat Ring	316 Stainless Steel			
		316 Stainless Steel + Stellite #6 Hard Facing			
4	Plug/Disc	316 Stainless Steel			
		316 Stainless Steel + Stellite #6 Hard Facing			
5	Valve Stem	316 Stainless Steel			
6	Cage	316 Stainless Steel			
7	Guide Bushing	316 Stainless Steel + Stellite #6 Hard Facing			
8	Body Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. + Teflon -Sprial Wound			
9	Seat Gasket	316 Stainless Steel+Graphite -Sprial Wound			
		316 S.S. +Teflon -Sprial Wound			
10	Paug Pin	316 Stainless Steel			
11	Packing	V-PTFE	Grahpite		
		PTFE Aramid Inorganic Coil			
12	Lantern Ring	316 Stainless Steel			
13	Packing Gland	316 Stainless Steel			
14	Packing Flange	316 Stainless Steel			
15	Body Stud Bolt	A193 Grade B8			
16	Body Stud Nut	A194 Grade 8			
17	Packing Stud Bolt	A193 Grade B8			
18	Packing Stud Nut	A194 Grade 8			
19	Yoke Half Clamp	304 Stainless Steel			
20	Clamp Hex. Bolt	A193 Grade B8			
21	Clamp Hex. Nut	A194 Grade 8			

1. Materials and processes in accordance with the requirements of NACE specification MR 0103 Applications requiring compliance to MR 0175, 2003 Rev. or ISO 15156 would require engineering review.
2. Inconel 718 will be substituted in applications when required due to the differential pressure.
3. Materials designated for these parts conform to NACE Class III (unexposed) bolting requirements.
4. Materials designated for these parts conform to NACE Class I or Class II (exposed) bolting requirements.
5. Consult UNICON for NACE Applications above ANSI Class 600 (PN 100) rating or above 450°F (232°C).
6. Optional component and materials for Close Clearance low flow trim option.
7. To be used with stainless steel body and bonnet.
8. Guide bushing not used with close clearance trim.
9. Solid Stellite is not available for Low-Noise/Anti-Cavitation plugs.

The structure of the V200 Series single seat control valve

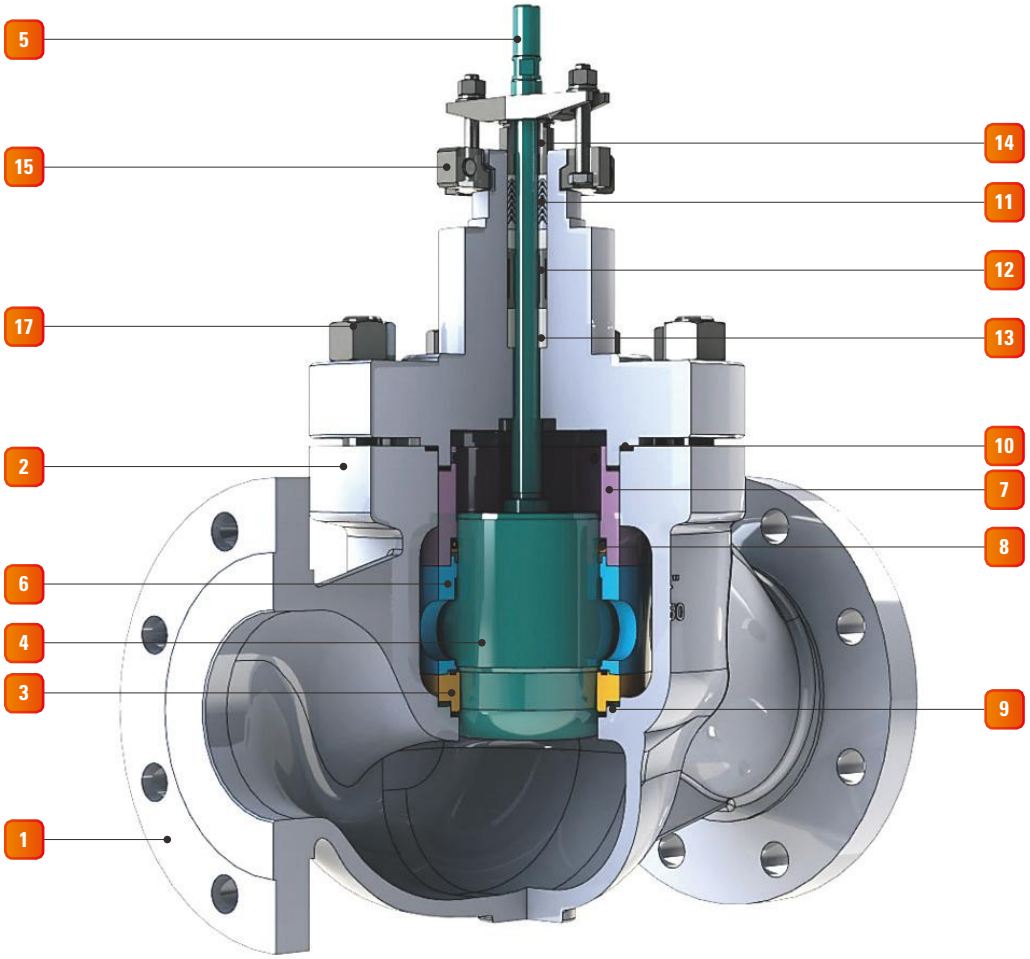

V200 Series Assembly Drawing

1	Valve Body	10	Body Gasket
2	Valve Bonnet	11	Packing
3	Seat Ring	12	Packing Spacer
4	Plug	13	Stem Guide
5	Stem	14	Packing Follower
6	Cage	15	Packing Flange
7	Balance Cylinder	16	Yoke Clamp
8	Balance Seal	17	Body Stud Bolt & Nut
9	Seat Ring Gasket		

V200 SERIES BODY DIMENSIONS (mm)

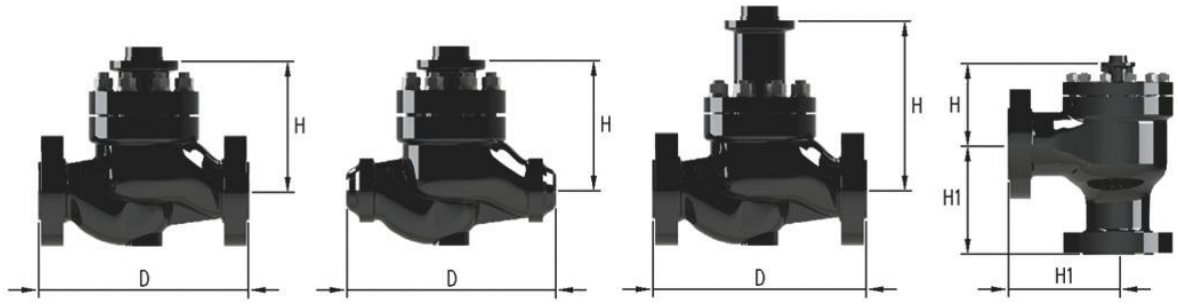

ANSI Class 150 through 2500 and equivalent PN

Valve Size (inches)	"D"																			
	ANSI Class 150-300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900		ANSI Class 1500		ANSI Class 2500	
	PN 20-50		PN 100		PN 150-250		PN 420		PN 20		PN 50		PN 100		PN 150		PN 250		PN 420	
	SW	BW	SW	BW	SW	BW	SW	BW	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ
1/2	-	-	-	210	-	-	-	-	184	184	190	190	203	203	292	292	292	292	318	318
3/4	-	-	-	210	-	-	-	-	184	184	194	194	206	206	292	292	292	292	318	318
1	210	210	210	210	210	-	210	-	184	184	197	197	210	210	292	292	292	292	318	318
1-1/2	251	251	251	251	235	-	-	-	222	222	235	235	251	251	333	333	333	333	381	381
2	286	286	286	286	292	-	-	-	254	254	267	267	286	286	375	375	375	375	400	400
2-1/2	292	292	311	311	-	410	-	-	276	276	292	292	311	311	410	410	410	410	441	441
3	318	318	337	337	-	460	-	498	298	298	318	318	337	337	441	441	460	460	498	498
4	368	368	394	394	-	530	-	575	352	352	368	368	394	394	511	511	530	530	575	575
5	-	425	-	425	-	-	-	-	403	403	425	425	457	457	-	-	-	-	-	-
6	-	451	-	508	-	768	-	819	451	451	473	473	508	508	714	714	768	768	819	819
8	-	568	-	610	-	832	-	1022	543	543	568	568	610	610	781	781	838	838	1022	1022
10	-	708	-	752	-	1067	-	-	673	673	708	708	752	752	991	991	1067	1067	1372	1372
12	-	737	-	819	-	-	-	1422	737	737	775	775	819	819	1130	1130	1219	1219	1575	1575
14	-	927	-	972	-	1257	-	-	889	889	927	927	972	972	1257	1257	1257	1257	-	-
16	-	1016	-	1108	-	1422	-	-	1016	1016	1057	1057	1108	1108	1422	1422	1530	1530	-	-
18	-	1143	-	-	-	1727	-	-	1143	1143	1184	1184	-	-	1727	1727	1727	1727	-	-
20	-	1500	-	-	-	-	-	-	1460	1460	1500	1500	1660	1660	1930	1930	-	-	-	-
24	-	1800	-	-	-	-	-	-	1760	1760	1800	1800	-	-	-	-	-	-	-	-

ANSI Class 150 through 2500 and equivalent PN

Valve Size (inches)	"H" About Glove Valve								
	Standard Bonnet				Extension Bonnet				Bellows Bonnet
	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300
	PN 20-50	PN 100	PN 150-250	PN 420	PN 20-50	PN 100	PN 150-250	PN 420	PN 20-50
1/2	86	86	-	185	-	-	-	-	225
3/4	124	124	-	185	-	-	-	-	235
1	124	124	185		224	227	-	-	235
1-1/2	145	145	187	-	255	255	-	-	252
2	156	156	230	-	256	256	-	-	263
2-1/2	190	190	-	-	295	295	-	-	315
3	210	210	274	-	320	320	384	450	335
4	260	265	334	-	350	355	-	-	337
5	316	316	-	-	423	423	-	-	533
6	322	325	455	480	448	451	555	643	555
8	380	380	471		520	520	551	657	624
10	390	415	-	-	560	585	643	-	616
12	443	458	-	-	543	558	-	-	771
14	496	525	-	-	596	625	720	-	-
16	529	565	-	-	669	780	-	-	-
18	663	-	747	-	-	-	-	-	-
20	-	-	-	-	-	-	-	-	-
24	835	-	-	-	-	-	-	-	-

Valve Size (inches)	" H1 "																	
	ANSI Class 150-300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900		ANSI Class 1500		ANSI Class 2500	
	PN 20-50		PN 100		PN 150-250		PN 420		PN 20		PN 50		PN 100		PN 150		PN 250		PN 420	
	SW	BW	SW	BW	SW	BW	SW	BW	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ
1/2	117	-	125	-	-	-	-	-	111	-	117	-	125	-	-	-	-	-	-	-
2	133	-	143	-	-	187.5	-	-	127	-	133	-	143	-	187.5	187.5	187.5	187.5	-	-
3	-	159	-	168	-	230	-	330	149	-	159	-	168	-	230	230	230	230	330	330
4	-	184	-	197	-	265	-	368.5	176	-	184	-	197	-	265	265	265	265	368.5	368.5
6	-	284	-	305	-	-	-	-	272	-	284	-	305	-	-	-	-	-	-	-

Valve Size (inches)	"H" About Angle Valve								
	Standard Bonnet				Extension Bonnet				Bellows Bonnet
	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300
	PN 20-50	PN 100	PN 150-250	PN 420	PN 20-50	PN 100	PN 150-250	PN 420	PN 20-50
1-1/2	145	145	187	-	255	255			252
2	156	156	230	-	256	256			263
3	210	210	274		320	320	384	450	335
4	260	265	334		350	355			337
6	322	325	455	480	448	451	555	643	555
3	210	210	274		320	320	384	450	335
4	260	265	334		350	355			337
6	323	327	455		392	396	555	555	555

ACTUATOR DIMENSIONS (MM)





A100/200 - Diaphragm Actuator Dimensions

Actuator Size	A	Without Handwheel		Top Handwheel			Side Handwheel		
		H		H		M	H		M
		DA	RA	DA	RA	DA, RA	DA	RA	DA, RA
250	252	332	352	474	474	250	-	-	-
290	294	369	389	540	540		-	-	-
370	374	410	430	580	580		-	-	-
370L	374	-	480	-	655		-	-	-
480	482	629	649	-	-	-	1162	1162	500
480H	482	-	649	-	-	-	-	1162	
550	560	678	698	-	-	-	1210	1210	
550L	560	-	756	-	-	-	-	1287	

A300 - Cylinder Actuator Dimensions

Actuator Size	A	Stroke	Double Type		Spring Return Type				M
			Without Handwheel	Side Handwheel	Without Handwheel		Side Handwheel		
			H	H	H		H		
					DA	RA	DA	RA	
12	370	100	711	1127	1055	1025	1471	1441	400
		120	731	1147	1055	1025	1471	1441	
		150	821	1272	-	-	-	-	
16	472	100	697	1137	1132	1102	1614	1584	
		120	717 / 877	1157 / 1317	1132	1102	1614	1584	
		150	809 / 907	1282 / 1382	1210	1192	1683	1665	
		200	957	1482	-	-	-	-	
20	578	150	916	1389 / 1540	1322	1322	1795	1795	
		200	966	1489 / 1640	1364	1364	1837	1837	
		300	1133	1873	-	-	-	-	500

NUMBERING SYSTEM

V	000	1.	2.	3.	4.	5.	-	6.	7.	8.	9.	10.	11.	12.	13.	14.	-	15.	16.	17.	18.

Valve Constructions

000. VALVE SERIES	
100	Globe single seat, unbalance type
200	Globe cage-guide, balance type

1. BODY SIZE (INCH)			
CODE	INCH	CODE	INCH
15	5/8	B0	8
20	3/4	B5	10
25	1	C0	12
32	1-1/4	C5	14
40	1-1/2	D0	16
50	2	D5	18
65	2-1/2	E0	20
80	3	E5	22
A0	4	F0	24
A2	5	YY	SPECIAL
A5	6		

2. PRESSURE RATING					
1	KS(JIS)10K	N	DIN PIN 16	B	ANSI 150LB
7	KS(JIS)16K	P	DIN PIN 25	D	ANSI 250LB
2	KS(JIS)20K	Q	DIN PIN 40	E	ANSI 300LB
3	KS(JIS)30K	R	DIN PIN 63	F	ANSI 400LB
4	KS(JIS)40K	S	DIN PIN 100	H	ANSI 600LB
6	KS(JIS)63K	T	DIN PIN 250	K	ANSI 900LB
		Y	SPECIAL	L	ANSI 1500LB
				M	ANSI 2500LB
				Z	ANSI 4500LB

3. END CONNECTION	
P	RF THREAD
R	RF FLANGED
U	UNICON
F	FF FLANGED
B	BUTT WELDING
C	TRY CLAMP
S	SOCKET WELDING
T	RING JIONT
N	NPT THREAD
L	LARGE GROOVE
M	MALE & FEMALE
W	WAFER (BOLTED)
Y	SPECIAL

4. BONNET TYPE	
P	STANDARD
C	CRYOGENIC
E	EXTENSION
F	FORM BELLOWS
W	WELD BELLOWS
J	JACKET
Y	SPECIAL

5. BODY & BONNET MATERLAL	
1	CAST STEEL(SCPH2) / A105
2	SSC13(SUS304) / A1351CF8
3	SSC14(SUS316) / A351 CF8
4	SSC 14(SUS316)
A	CHROME MOLY (WC6)
B	CHROME MOLY (WC9)
F	CHROME MOLY (F11)
K	CHROME MOLY (F22)
Y	SPECIAL

Trim Constructions

6. TRIM TYPE	
1	Unbalanced
2	Balanced
3	Auxiliary Pilot
Y	SPECIAL

7. FLOW CHARACTERISTIC	
F	EQUAK PERCENTAGE
L	LINEAR
Q	ON-OFF (QUICK-OPEN)
M	MODIFIED EQ %
D	MODIFIED LINEAR %

8. STEM TYPE	
S	STANDARD
B	BELLOWS
Y	SPECIAL

9. PLUG TYPE	
P	P-PORT
F	FLAT
M	MULTI - STEP
Y	SPECIAL

10. STEM / PLUG MATERIAL	
3	SSC 13 (SUS304)
4	SSC 14 (SUS316)
9	SSC13(SUS304)+HF
A	SSC14(SUS316)+HF
L	SUS316+STL
F	SUS316+STF
P	17 - 4PH(630SS)
K	410SS
L	420 J2 SS
M	CHROME MODY (F11)
N	CHROME MODY (F12)
Y	SPECIAL

11. CAGE TYPE	
O	ON / OFF
W	WINDOW
1	1 - STAGE
2	2 - STAGE
M	MULTI - STAGE
D	DISK STACK
Y	SPECIAL

12. CAGE MATERIAL	
3	SSC 13 (SUS304)
4	SSC 14 (SUS316)
9	SSC13(SUS304)+HF
A	SSC14(SUS316)+HF
P	17 - 4PH(630SS)
K	410SS
L	420 J2 SS
M	CHROME MODY (F11)
N	CHROME MODY (F12)
Y	SPECIAL

13. SEAT TYPE	
S	STANDARD
F	SOFT SEAT
M	MULTI STEP
V	V – NOTCH
C	SCREW
Y	SPECIAL

14. SEAT MATERIAL	
3	SSC 13 (SUS304)
4	SSC 14 (SUS316)
9	SSC13(SUS304)+HF
A	SSC14(SUS316)+HF
L	SUS316+STL
F	SUS316+STF
P	17 - 4PH(630SS)
K	410SS
L	420 J2 SS
M	CHROME MODY (F11)
N	CHROME MODY (F12)
Y	SPECIAL

Others

15. BALANCE SEAL MATERIAL	
N	NONE
A	EPDM
B	VITON
D	316SS+ TFE
E	CARBON
F	GRAPHITE
H	410SS + CARBON
K	718 INCONEL
Y	SPECIAL

16. PACKING	
T	TEFLON
E	TEFLON - DOUBLE
G	GRAPHITE
R	GRAPHITE - DOUBLE
Y	SPECIAL

17. ACTUATOR	
B	BEAR STEM
G	GEAR BOX
D	DIAPHRAGM
P	PNEUMATIC CYLINDER
M	ELECTRO MOTOR
H	HYDRO CYLINDER
Y	SPECIAL

18. FAIL POSITION	
O	FAIL OPEN POSITION
S	FAIL CLOSE POSITION
L	FAIL LAST POSITION

UNICON

UNICON SYSTEM CO.,LTD.

21 Block 13Lot, Gangchon-ro, 139beon-gil 72, Danwon-gu,
Ansan-si, Gyeonggi-do, Korea(Zipcode: 425/833)

TEL +82-31-506-0718
Fax +82-31-506-0738
E-mail uniconsales@uniconvalve.com

www.uniconvalve.com

Product of our comprehensive range of valves for the energy & process industries

For more information about Union Flow Control System Group and its products,
contact www.uniconvalve.com or call Korea.

Manufacturing Facilities